



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

The RetroMount series roof hatch has a low profile frame with integrated counterflash that is designed to mount on a roof curb. It is also a replacement option for a damaged roof hatch without re-roofing. Simply remove the existing hatch cover and reuse the existing curb.

SPECIFICATIONS

FINISH: White textured powder coat paint on steel. Mill finish on aluminum.

GASKETING: Continuous, weatherproof EPDM sponge rubber adhesivebacked seal

INSULATION: 1" polyisocyanurate in curb and cover with thermal resistance R-6

HOLD-OPEN ARM: Clear zinc-plated automatic locking hold open arm with red vinyl grip for one handed door operation

LATCH: Clear zinc-plated steel slam latch with inside and outside handles and padlock hasps. Holds covers closed against a 20psf wind uplift.

LATCH: Heavy duty zinc plated steel pintle hinge system

SPRINGS: Powder coated, oil tempered, steel torsion spring provides counterbalanced door lift assistance

HARDWARE: Zinc-plated steel anchor tabs included with 1/4-20x3/4" Philips head, self-tapping sheet metal screws for securing to inside of existing curb

SIZES: W x L (where L is hinged side)
Minimum: 24" X 24"
Maximum: 48" X 54"

SKU: **BA-RFRH-G**

DOMED EQUIPMENT HATCH



DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

STANDARD SIZES:

MODEL	MATERIAL	CURB OPENING	WEIGHT
RHRMG-1WT	STEEL, WHT TEX	36" x 30"	115
RHRMG-2WT	STEEL, WHT TEX	30" x 54"	148
RHRMG-4WT	STEEL, WHT TEX	36" x 36"	125
RHRMG-5WT	STEEL, WHT TEX	48" x 48"	195
RHRMA-1	ALUMINUM, MILL	36" x 30"	60
RHRMA-2	ALUMINUM, MILL	30" x 54"	72
RHRMA-4	ALUMINUM, MILL	36" x 36"	65
RHRMA-5	ALUMINUM, MILL	48" x 48"	105

MATERIAL:




Frame: Steel - 14 gauge galvanized steel

Aluminum - 11 gauge aluminum

Cover: Steel - 14 gauge with 22 gauge liner galvanized steel.

Aluminum - 11 gauge with 18 gauge liner aluminum

Formed and welded cover with a liner. Supports a live load of 40psf.

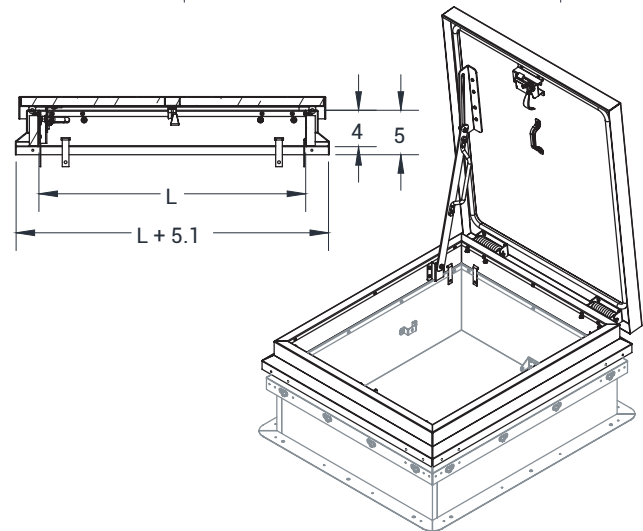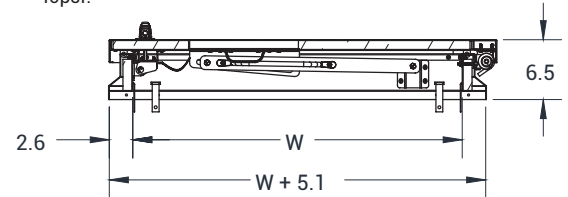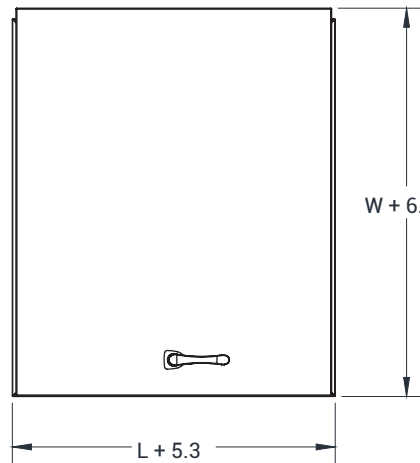

For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com