



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

- For installation in drywall walls requiring concealing of the door panel consistent to surroundings
- For use in walls, fire-rated for up to 90-minutes with a temperature rise of max 250°C (450°F) over 30 minutes

FEATURES

- Recessed reinforced door fitted with 5/8" Fire-rated drywall.
- Concealed hinge & self-centering device ensures seamless appearance in walls
- Self-closing & self-latching door mechanism
- Perforated Frame ensures trouble-free application of skim coat to edge of the door
- Zinc coated steel provides superior corrosion resistance
- Testing standards UL 10(b) and ULC S104

SPECIFICATIONS

DOOR: Steel-22 Gauge recessed fitted with 5/8" thick drywall suitable to accept skim coat finish on site.

DOOR FRAME: Steel-22 Gauge press bent for strength and rigidity with pre-punched flanges for convenient mounting and accepting skim coat finish on site

HINGE: Concealed

FIRE RATING (WALLS): Meets 1½ hour fire rating requirement in accordance with UL 10(b) and CAN/ULC S104-10 for max size upto 24" x 36"

LATCH: Self-latching bolt, operated by flush key

FINISH: Satin coat steel

For a complete list of options visit www.BestAccessDoors.com

SKU: **BA-SMCW**

FIRE RATED ACCESS DOOR

RECESSED FOR DRYWALL WALLS



"1 Latch"


"2 Latches"

DIMENSIONS AND APPEARANCE

DOOR SIZE W x H INCHES (MM)	LATCHES	WEIGHT	
		LBS	KG
12 x 12 (305 x 305)	1	10.0	4.50
16 x 16 (406 x 406)	1	14.0	6.40
18 x 18 (457 x 457)	1	18.0	8.20
24 x 24 (610 x 610)	2	29.0	13.1
26 x 36 (610 x 914)	2	42.0	19.0


Wall opening is W + 3/8" (9 mm)

For detailed specifications see submittal sheet

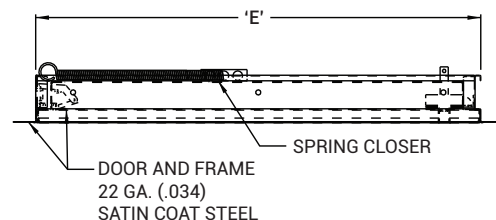

DOOR AND FRAME
22 GA. (.034)
SATIN COAT STEEL


MANUFACTURED BY ACUDOR

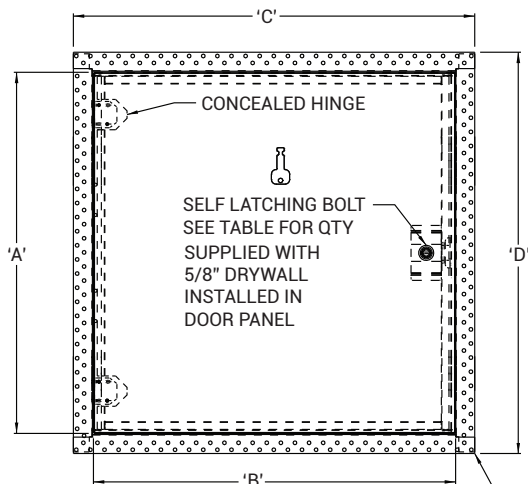

VERTICAL WALLS

FOR USE IN VERTICAL WALLS FIRE RATED FOR UP TO 90 MINUTES WITH TEMPERATURE RISE RATING OF MAXIMUM 250° C (450° F) OVER 30 MINUTES.
CONFORMS TO: UL10(B)
CERTIFIED TO: CAN/ULC S104 THIS DOOR HAS BEEN APPROVED BY WARNOCK HERSEY INTERNATIONAL (MAX. SIZE 24" X 36")

PATENT PENDING

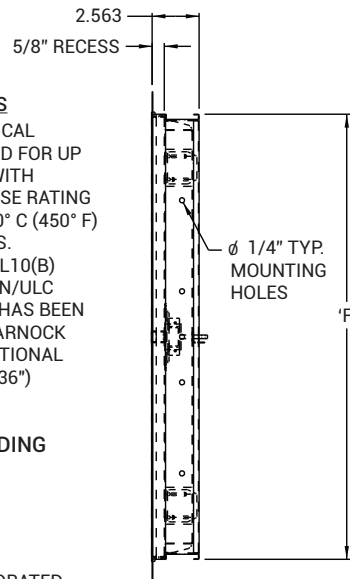

FLANGE FRAME PERFORATED

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003




WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com



BA-SMCW

RECESSED FOR DRYWALL

NOMINAL DOOR SIZE	A	B	C	D	E	F	LOCK
Inches (mm)							
12 x 12 (305 x 305)	11.83 (300)	11.89 (302)	14.48 (368)	14.48 (368)	12.04 (306)	12.04 (306)	1
14 x 14 (356 x 356)	13.83 (351)	13.89 (353)	16.48 (419)	16.48 (419)	14.04 (357)	14.04 (357)	1
16 x 16 (406 x 406)	15.83 (402)	15.89 (404)	18.48 (469)	18.48 (469)	16.04 (407)	16.04 (407)	1
18 x 18 (457 x 457)	17.83 (453)	17.89 (454)	20.48 (520)	20.48 (520)	18.04 (458)	18.04 (458)	1
24 x 24 (610 x 610)	23.83 (605)	23.89 (607)	26.48 (673)	26.48 (673)	24.04 (611)	24.04 (611)	2
24 x 36 (610 x 914)	35.83 (910)	23.89 (607)	26.48 (673)	38.48 (977)	24.04 (611)	36.04 (915)	2

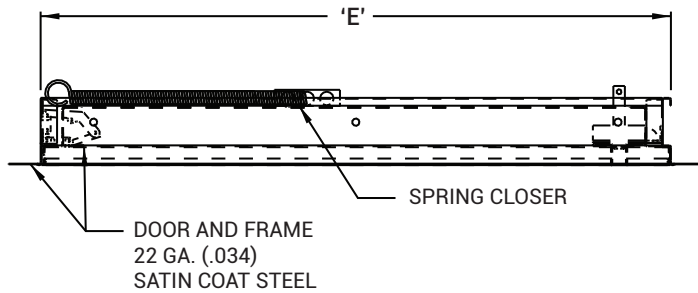

VERTICAL WALLS

FOR USE IN VERTICAL WALLS FIRE RATED FOR UP TO 90 MINUTES WITH TEMPERATURE RISE RATING OF MAXIMUM 250° C (450° F) OVER 30 MINUTES.
CONFORMS TO: UL10(B) CERTIFIED TO: CAN/ULC S104
THIS DOOR HAS BEEN APPROVED BY WARNOCK HERSEY INTERNATIONAL (MAX. SIZE 24" x 36")

