

Quality Access Doors- FAST!

DESCRIPTION

The BA-STC Noise Containment and Sound Transmission Blocking Requirements for Walls with the US Patent.

CONSTRUCTION

- 1. Frame shall be 16 gauge steel.
- 2. Door shall be 20 gauge steel.
- 3. Trim shall be 1" wide, one piece construction.
- 4. Gasketing between door and frame 3/8" wide by 1/8" thick closed cell neoprene gasketing.
- 5. Acoustical insulation shall be 2 3/8" thick.
- 6. Hinge shall be continuous piano hinge.
- 7. Latches shall be Lift & Turn Compression Latch finished in chrome with cup sealing gasket finished in chrome, keyed.
- 8. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel shall have No. 4 finish.
- 9. Independently tested in accordance with ASTM: E1332, ASTM: E90, and ASTM: E413, and rated of STC 64 when installed according to manufacture's instruction
- Judicial Settings; GSA Acoustic Isolation Ratings
- Learning Spaces; Music Rooms, Performing Spaces
- Healthcare; HIPAA Requirements for Patient Privacy
- LEED Enhanced Acoustical Performance Credits for Schools

For a complete list of options visit www.BestAccessDoors.com

SUBMITTAL/TECHNICAL DATA SHEET







■ DIMENSIONS AND APPEARANCE >> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES (Special Sizes on Request):

DOOR SIZE W" X H"	WALL/CEILING OPENING (IN.)	NUMBER OF STUD LATCHES	SHIP WEIGHT LBS.
12" X 12"	12 3/8 X 12 3/8	1	6.3 LBS
18" X 18"	18 3/8 X 18 3/8	1	10.5 LBS
24" X 24"	24 3/8 X 24 3/8	2	16.0 LBS

*Available in Stainless Steel



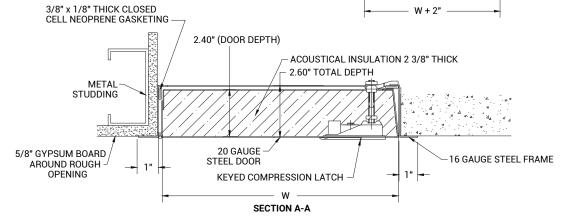

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	Н	OPTIONS	
ARCHITECT:					
DEALER:					
CONTRACTOR:					
LOCATION:	SPECIAL INSTRUCTIONS:				
DATE:					
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL : (signature or stamp)				



To view Pricing and Additional Product Info.



TELEPHONE: 1-800-483-0823 FAX:

1-888-828-6021



228 PARK AVE. S. #76520 NEW YORK, NY, 10003



WEBSITE: www.BestAccessDoors.com