



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

Assures a tight seal without obstruction in the air system

FEATURES

- Insulated door panel, along with the gasketing between the door and frame
- 5/8" notched knock over tabs on the inside of the frame provide for easy installation
- These doors are designed for use in LOW to medium pressure up to 3" static W.G

OPTIONS

- Aluminum
- Stainless steel
- Cylinder lock & key
- HASP + staple
- L-handle

SPECIFICATIONS

MATERIAL: Galvanized steel, double panel

DOOR: 24 gauge

MOUNTING FRAME: 24 gauge with 5/8" notched knock over tabs


GASKETING: 1/8" thick by 1/2" wide closed cell neoprene gasketing between door and frame and also between frame and duct

HINGE: Continuous aluminum piano hinge

INSULATION: Door panel filled with 2" fiberglass insulation (7.7 R factor), compressed into 1".

LATCH: Self tightening, hand operated cam latch

For a complete list of options visit www.BestAccessDoors.com

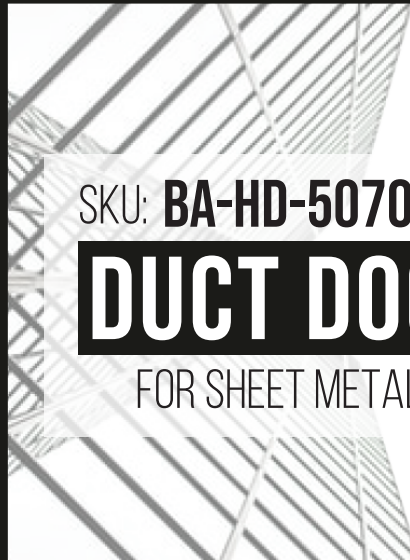

SKU: **BA-HD-5070**

DUCT DOOR

FOR SHEET METAL DUCT




DIMENSIONS AND APPEARANCE



>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

| DOOR SIZE W x H INCHES (MM) | DUCT OPENING | WEIGHT | |
|--------------------------------|-----------------|--------|-----|
| | | LBS | KG |
| 6 x 6 (152 x 152) | 4.75" X 4.75" | 1.25 | 0.6 |
| 8 x 8 (203 x 203) | 6.75" X 6.75" | 1.75 | 0.8 |
| 10 x 10 (254 x 254) | 8.75" X 8.75" | 2.75 | 1.3 |
| 12 x 12 (304 x 304) | 10.75" X 10.75" | 3.75 | 1.7 |
| 14 x 14 (356 x 356) | 12.75" X 12.75" | 4.75 | 2.2 |
| 16 x 16 (406 x 406) | 14.75" X 14.75" | 5.25 | 2.4 |
| 18 x 18 (457 x 457) | 16.75" X 16.75" | 6.75 | 3.1 |
| 20 x 20 (508 x 508) | 18.75" X 18.75" | 9.00 | 4.1 |
| 24 x 24 (610 x 610) | 22.75" X 22.75" | 12.0 | 5.5 |

Duct opening is normal door size minus -1 1/4" (31mm)
For detailed specifications see submittal sheet

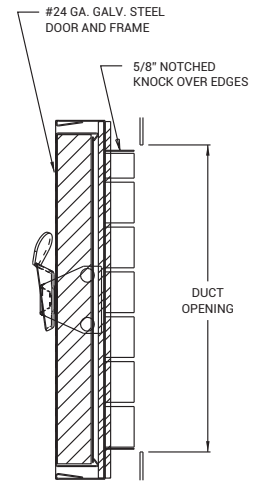

MANUFACTURED BY ACUDOR

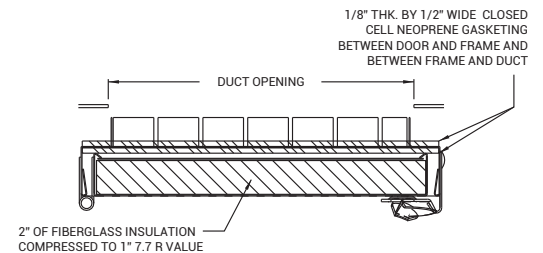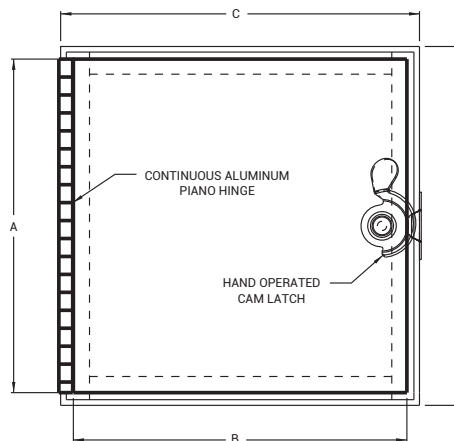

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

| PROJECT NAME : | QTY | W | H | OPTIONS |
|------------------------|--|---|---|---------|
| ARCHITECT : | | | | |
| DEALER : | | | | |
| CONTRACTOR : | | | | |
| LOCATION : | SPECIAL INSTRUCTIONS : | | | |
| DATE : | | | | |
| TAGGING INSTRUCTIONS : | SUBMITTAL APPROVAL : (signature or stamp) | | | |

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com

E-MAIL:
info@bestaccessdoors.com

BA-HD-5070 DUCT DOOR - HINGED

| NOMINAL DOOR SIZE | A | B | C | D | DUCT OPENING | LATCH |
|---------------------|------------|------------|----------|----------|---------------------------|-------|
| Inches (mm) | | | | | | |
| 6 x 6 (152 x 152) | 5.5 (140) | 5.5 (140) | 6 (152) | 6 (152) | 4.75 X 4.75 (121 X 121) | 1 |
| 8 x 8 (203 x 203) | 7.5 (191) | 7.5 (191) | 8 (203) | 8 (203) | 6.75 X 6.75 (171 X 171) | 1 |
| 10 x 10 (254 x 254) | 9.5 (241) | 9.5 (241) | 10 (250) | 10 (250) | 8.75 X 8.75 (222 X 222) | 1 |
| 12 x 12 (304 x 304) | 11.5 (292) | 11.5 (292) | 12 (304) | 12 (304) | 10.75 X 10.75 (273 X 273) | 1 |
| 14 x 14 (356 x 356) | 13.5 (343) | 13.5 (343) | 14 (356) | 14 (356) | 12.75 X 12.75 (324 X 324) | 2 |
| 16 x 16 (406 x 406) | 15.5 (394) | 15.5 (394) | 16 (356) | 16 (356) | 14.75 X 14.75 (375 X 375) | 2 |
| 18 x 18 (457 x 457) | 17.5 (445) | 17.5 (445) | 18 (457) | 18 (457) | 16.75 X 16.75 (425 X 425) | 2 |
| 20 x 20 (508 x 508) | 19.5 (495) | 19.5 (495) | 20 (508) | 20 (508) | 18.75 X 18.75 (476 X 476) | 2 |
| 24 x 24 (610 x 610) | 23.5 (597) | 23.5 (597) | 24 (610) | 24 (610) | 22.75 X 22.75 (578 X 578) | 2 |

