

Quality Access Doors- FAST

DESCRIPTIONS

The easy, one-hand operation, to the fully open or closed position, provides the user the security of having one hand firmly on the ladder at all times. Available in galvanized steel, aluminum or stainless steel construction.

SPECIFICATIONS

MATERIAL:

STEEL: Cover and frame are 14 gauge (1.9mm) G-90 paint bond galvanized steel. ALUMINUM: Cover and frame are 11 gauge (2.3mm) aluminum

STAINLESS STEEL: Cover and frame are 14 gauge (1.9mm) Type 304 stainless steel

COVER: Brakeformed, hollow-metal design with 1 "(25.4mm) concealed fiberglass insulation, 3" (76mm) beaded, overlapping flange, fully welded at corners, and internally reinforced for 40 psf (195 kg/m') live load.

CURB: 12" (305mm) in height with integral capflashing, 1 "(25.4mm) fiberboard insulation, fully welded at corners, and 3-1/2" (89mm) mounting flange with 7/16" holes (11mm) provided for securing frame to the roof deck

GASKET: Extruded EPDM rubber gasket permanently adhered to cover.

HINGES: Heavy-duty pintle hinges with 3/8" (9.5mm) Type 316 stainless steel hinge pins.

LATCH: Slam latch with interior and exterior turn handles and padlock hasps.

LIFT ASSISTANCE: Compression spring operators enclosed in telescopic tubes Automatic hold-open arm with grip handle release.

FINISH:

STEEL: Alkyd base red oxide primer Aluminum: Mill finish Stainless Steel: Type 304 stainless steel with head blast finish

For a complete list of options visit www.BestAccessDoors.com

-B E S F

To view Pricing and

Additional Product Info.

CCFSS

E E RS

SUBMITTAL/TECHNICAL DATA SHEET






DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

SIZE		STEEL			STEEL CURB & ALUMINUM COVER			ALUMINUM			STAINLESS STEEL		
(width :	(width x length)		Weight		Model #	Weight		Model #	Weight		Model #	Weight	
inches	mm	Model #	lbs.	kg.	would #	lbs.	kg.	woder #	lbs.	kg.	Wodel #	lbs.	kg.
36 x 30	914 x 762	S-20	183	83	S-40	150	68	S-50	110	50	S-90*	183	83
36 x 36	914 x 914	E-20	207	94	E-40	184	84	E-50	117	53	E-90*	207	94

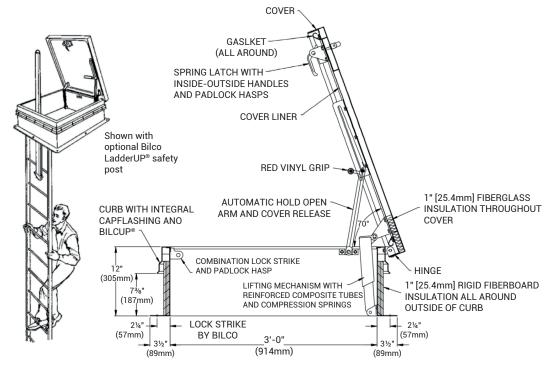

PROJECT DATA

Custom Sizes Available - Fast!









WEBSITE: www.BestAccessDoors.com



•