



Quality Access Doors- **FAST!**

STANDARD OPTIONS

MATERIAL:

16 gauge cold rolled steel frame &
20 gauge galvalume steel door

HINGE:

Continuous piano hinge

INSULATION:

Mineral wool

LOCK / LATCH:

Self latching tool-key operated slam
latch and/or ring operated slam
latch, both included

INSIDE PANEL RELEASE:

Standard on all doors over 12" x 12"

AUTOMATIC PANEL CLOSER:

Standard on all doors

FINISH:

Stainless steel 304 #4 (brushed
finish)

PACKAGING:

Individually wrapped, 1 per box

OPTIONS AVAILABLE

LOCK / LATCH:

- Mortise deadbolt lock
- Hex head slam latch
- Handle operated slam latch
- Mortise preparation for cylinder
(cylinder optional)

MATERIAL:

Stainless steel #4 (brushed finish)

MASONRY ANCHOR:

Available on all sizes

Fire Rating information on Page 2

For a complete list of options visit
www.BestAccessDoors.com

Scan  or  Click



To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**



SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-FRI-SS**


FIRE RATED ACCESS PANEL INSULATED

STAINLESS STEEL




INSTALLATION

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

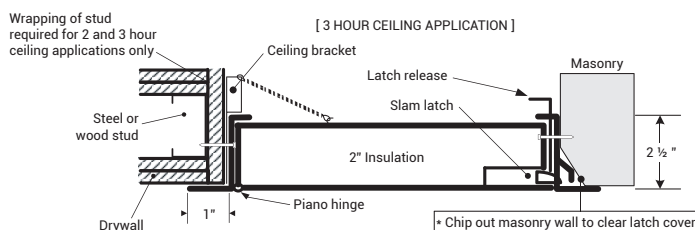

[1 HOUR CEILING APPLICATION]




Authorities Having
Jurisdiction (AHJ) should
be consulted in all cases
as to the particular
requirements covering
the installation and use
of fire rated access doors.

DIMENSIONS AND APPEARANCE

STANDARD SIZES:

DOOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8 (203 x 203)	1	7	3.2
10 x 10 (254 x 254)	1	8	3.6
12 x 12 (304 x 304)	1	10	4.5
14 x 14 (355 x 355)	1	12	5.4
16 x 16 (406 x 406)	1	14	6.4
18 x 18 (457 x 457)	1	17	7.7
22 x 22 (558 x 558)	1	20	9.1
22 x 30 (558 x 762)	1	30	13.6
22 x 36 (558 x 914)	2	34	15.5
24 x 24 (609 x 609)	1	28	12.7
24 x 36 (609 x 914)	2	36	16.4
* 24 x 48 (609 x 1219)	2	48	21.8
* 30 x 30 (762 x 762)	1	40	18.1
* 32 x 32 (812 x 812)	2	43	19.5
* 36 x 36 (914 x 914)	2	50	22.7
* 48 x 48 (1219 x 1219)	2	83	37.7

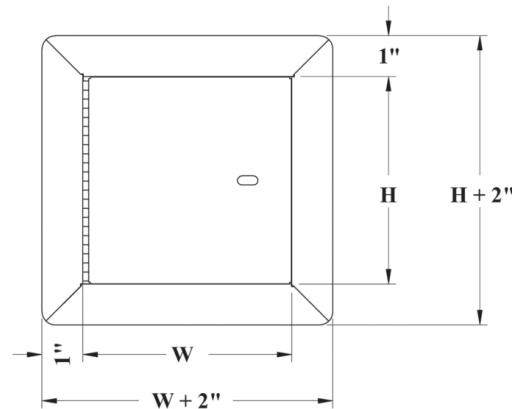

ROUGH WALL OPENING IS DOOR SIZE + 1/4" OR + 6MM

* Not available for ceiling rating (maximum 24"x36")

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:

1-800-483-0823

FAX:

1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:

www.BestAccessDoors.com

E-MAIL:

info@BestAccessDoors.com

