



Quality Access Doors- FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## SPECIFICATION

**DOOR AND TRIM:** 14 ga. steel. Trim being 1-1/2" wide.

**RETURN FRAME:** 18 ga. steel having a depth of 1-3/4".

**HINGES:** Fully-concealed piano-type hinge. Allows opening to 170°. Number of hinges varies with size of door and will be placed on long side of door unless otherwise requested.

**LATCHES:** Flush, stainless steel cam operated with screwdriver. Latches are positioned opposite hinge as well as top and bottom on larger sizes.

**FINISH:** Electrostatically applied baked grey enamel, over rust-inhibiting phosphate treated steel. This coating can be used as a finish or as a prime coating.

## OPTIONS (at additional cost)

- Key Cylinder Lock with 2 keys
- Air-tight Neoprene Gasketing
- Stainless Steel Finish #304 or #316
- White Baked Enamel Finish
- Galvanized/Zinc Coating Finish
- Additional Accessories refer to back cover
- Masonry Anchor Straps

For a complete list of options visit [www.BestAccessDoors.com](http://www.BestAccessDoors.com)

SKU: **BA-FRS**

# PREMIUM GENERAL PURPOSE ACCESS DOOR



## DIMENSIONS AND APPEARANCE


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

### STANDARD SIZES:


DOOR SIZE W" X H"	WALL OPENING	NO. OF HINGES	CAM LATCH	SHIP WT. LBS.
6" X 6"	6 1/4" X 6 1/4"	1	1	*4 LBS
8" X 8"	8 1/4" X 8 1/4"	1	1	*5 LBS
8" X 12"	8 1/4" X 12 1/4"	1	1	*6 LBS
8" X 16"	8 1/4" X 16 1/4"	2	1	*8 LBS
10" X 10"	10 1/4" X 10 1/4"	1	1	*6 LBS
12" X 12"	12 1/4" X 12 1/4"	1	3	*8 LBS
12" X 16"	12 1/4" X 16 1/4"	2	3	10 LBS
12" X 18"	12 1/4" X 18 1/4"	2	3	11 LBS
12" X 24"	12 1/4" X 24 1/4"	3	4	14 LBS
14" X 14"	14 1/4" X 14 1/4"	2	3	*10 LBS
16" X 16"	16 1/4" X 16 1/4"	2	3	*13 LBS
16" X 20"	16 1/4" X 20 1/4"	3	3	16 LBS
16" X 24"	16 1/4" X 24 1/4"	3	4	17 LBS
18" X 18"	18 1/4" X 18 1/4"	3	3	*14 LBS
18" X 24"	18 1/4" X 24 1/4"	3	4	18 LBS
18" X 36"	18 1/4" X 36 1/4"	+	5	29 LBS
20" X 20"	20 1/4" X 20 1/4"	3	3	17 LBS
20" X 24"	20 1/4" X 24 1/4"	3	4	21 LBS
20" X 30"	20 1/4" X 30 1/4"	+	4	23 LBS
22" X 22"	22 1/4" X 22 1/4"	3	4	22 LBS
22" X 24"	22 1/4" X 24 1/4"	3	4	23 LBS
22" X 30"	22 1/4" X 30 1/4"	+	4	25 LBS
22" X 36"	22 1/4" X 36 1/4"	+	5	32 LBS
24" X 24"	24 1/4" X 24 1/4"	3	4	*24 LBS
24" X 30"	24 1/4" X 30 1/4"	+	4	27 LBS
24" X 36"	24 1/4" X 36 1/4"	+	5	35 LBS
24" X 48"	24 1/4" X 48 1/4"	+	6	43 LBS
30" X 30"	30 1/4" X 30 1/4"	+	6	32 LBS
30" X 36"	30 1/4" X 36 1/4"	+	6	39 LBS
36" X 36"	36 1/4" X 36 1/4"	+	7	44 LBS
36" X 48"	36 1/4" X 48 1/4"	+	8	57 LBS
48" X 48"	48 1/4" X 48 1/4"	+	12	70 LBS

+Full Length Piano Hinge  
\*Standard in Stainless Steel

### ELEVATION

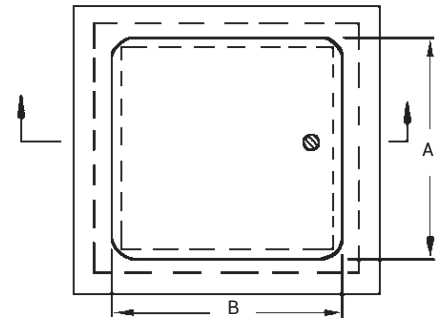

### SECTION DETAIL

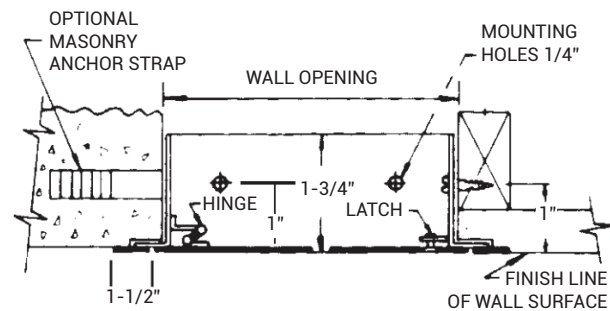

## PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click



To view Pricing and Additional Product Info.

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)