



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

VersaMount™ access hatch combines the ease of operation, weathertight performance, and the long service life of a quality Bilco roof hatch, with the added advantage of enhanced installation flexibility.

SPECIFICATIONS

MATERIAL AND FINISH:

Cover and frame are 14 ga. (1.9mm) paint bond galvanized steel/red & Finish: oxide primer [or 11 ga. (2.3mm) aluminum / mill finish] [or 14ga. (1.9mm) Type 304 stainless steel / sand blast finish]. Hardware components are zinc-plated and chromate sealed, unless otherwise noted.

COVER:

Breakformed, hollow-metal design with 1" (25mm) concealed insulation, 3" (76mm) beaded, overlapping flange, fully welded at corners, and internally reinforced for 40 psf (195 kg/m²) live load.

CURB:

Breakformed, hollow-metal design with 1" (25mm) concealed insulation, 2-5/8" (67mm) mounting flange and 1-1/2" (38mm) apron, fully welded at corners. Stainless steel anchor clips are included.

GASKET:

Specially designed, EPDM rubber gasket, permanently adhered to the cover.

HINGES:

Heavy pintle hinges with 3/8" (10mm) solid stainless steel hinge pins.

LATCH:

Spring latch with inside and outside handles and padlock hasps.

ASSISTANCE:

Electrostatically coated compression springs enclosed in self-lubricating Assistance: composite cylinders. Automatic hold-open arm with 1" (25mm) comfort grip handle.

WARRANTY:

Five (5) years from date of purchase covering defects in material and workmanship.

For a complete list of options visit www.BestAccessDoors.com

SKU: BA-NB-90VM

VERSAMOUNT ACCESS HATCH




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES AND WEIGHTS

SIZE	MODEL #	SHIPPING WEIGHT
3'0" X 2'6" (914 x 762 mm)	S-90VM	180 lbs (82kg)
2'6" X 4'6" (762 x 1372 mm)	NB-90VM	195 lbs (89kg)
2'6" X 8'0" (762 x 2438 mm)	L-90VM	352 lbs (160kg)
1m x 1m	EW-90VM	187 lbs (85kg)

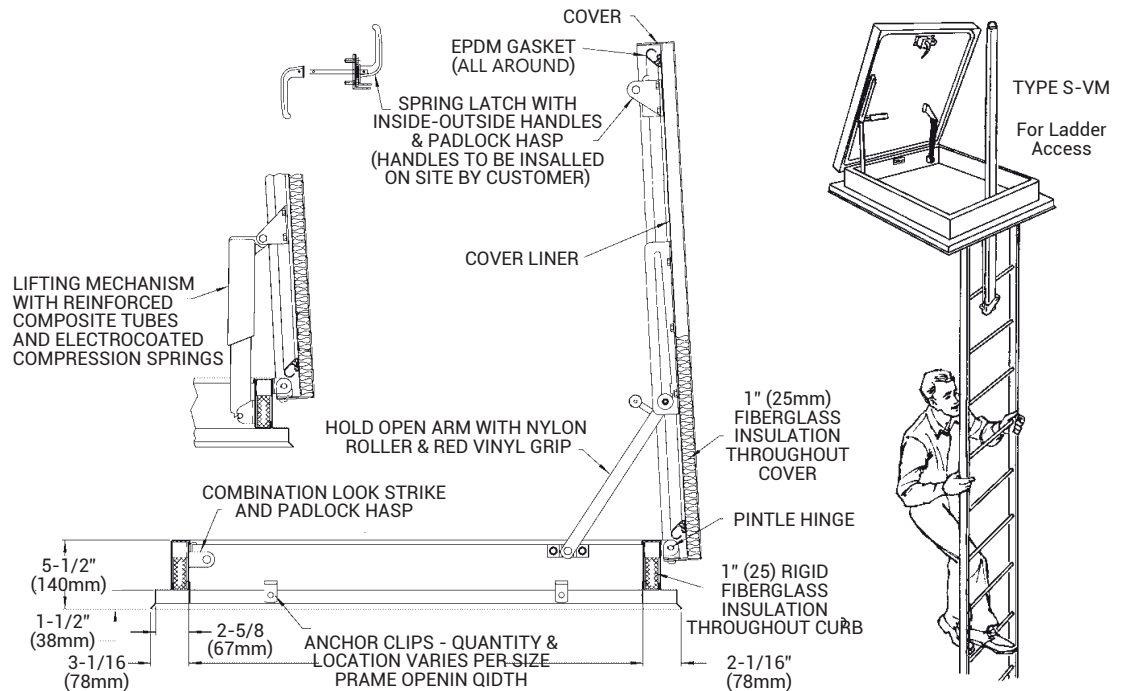

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com