



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

Shur-Lok Access Doors are designed for drywall, masonry or concrete construction and provide the security required in today's schools, hospitals, hotels, and correctional institutions.

Door Panel are fabricated from 14 gauge, galvanized steel and the door is provided with a 16 gauge vertical reinforcement channel.

Frame is fabricated from 16 gauge, galvanized steel.

Lock is an automatic springbolt type featuring a precision mechanism. When the door is closed in the locked position, the uniquely designed angled cam lock automatically engages. The key can only be removed when the lock is in the locked position.

Hinge is a concealed continuous stainless steel piano hinge.

Finish is a white prime coat suitable for painting.

GUIDE SPECIFICATION

Shur-Lok Access Doors (specify model number and options). Access door panel shall be fabricated from 14 gauge, galvanized steel with a white prime coat finish. Frame is fabricated from 16 gauge, galvanized steel with a white prime coat finish. Door shall have a 16 gauge vertical reinforcement channel, a concealed hinge, and an automatic locking, spring bolt lock. Finish shall be a white prime coat suitable for painting.

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

-SLK Shur-Lok Access Door

SUFFIX OPTIONS

-AS Automatic Spring Door Closer
 -SS Stainless Steel Construction (Type 304 No. 4 Satin Finish)

For a complete list of options visit www.BestAccessDoors.com

SKU: **BA-SLK**

SHUR-LOK ACCESS DOORS



DIMENSIONS AND APPEARANCE



>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

STANDARD SIZES:

NOMINAL DOOR SIZE (W x H)	WALL OPENING (minimum required)	KEY QTY	WEIGHT LBS	-SDL (Extra Latches)
SLK 8" x 8"	8-1/2" x 8-1/2"	1	4.0 LBS.	0
SLK 10" x 10"	10-1/2" x 10-1/2"	1	5.5 LBS.	0
SLK 12" x 12"	12-1/2" x 12-1/2"	1	7.0 LBS.	0
SLK 14" x 14"	14-1/2" x 14-1/2"	1	8.0 LBS.	0
SLK 16" x 16"	16-1/2" x 16-1/2"	1	10.0 LBS.	0
SLK 18" x 18"	18-1/2" x 18-1/2"	1	12.0 LBS.	2
SLK 18" x 24"	18-1/2" x 24-1/2"	1	16.0 LBS.	4
SLK 22" x 22"	22-1/2" x 22-1/2"	1	17.5 LBS.	2
SLK 24" x 24"	24-1/2" x 24-1/2"	1	20.5 LBS.	2
SLK 24" x 30"	24-1/2" x 30-1/2"	1	24.0 LBS.	4
SLK 24" x 36"	24-1/2" x 36-1/2"	1	28.0 LBS.	6
SLK 30" x 30"	30-1/2" x 30-1/2"	1	28.5 LBS.	6
SLK 36" x 36"	36-1/2" x 36-1/2"	1	41.5 LBS.	8

NOTES:

1. CONCEALED HINGE
2. DOOR
3. REINFORCEMENT CHANNEL
4. SPRING DOOR LOCK
5. SDL (EXTRA LATCHES) BIG DOORS ONLY

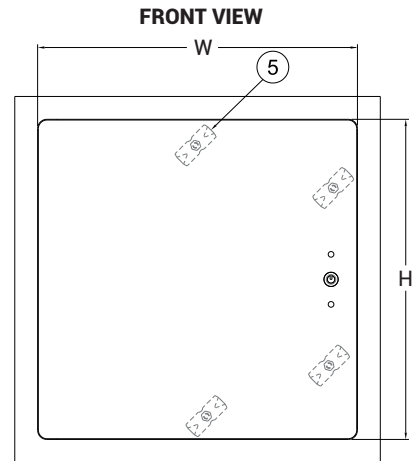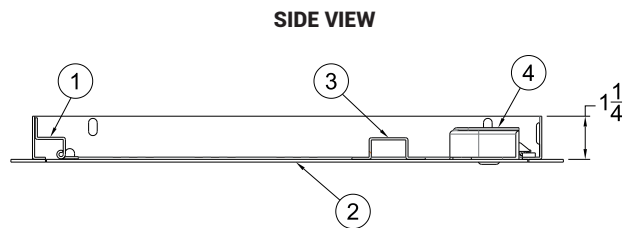

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com