



Quality Access Doors- **FAST!**

DESCRIPTIONS

High-profile step flashing designed for FV, FVS, FS, and FX deck-mounted skylights. It provides a flashing connection between the skylight and high-profile corrugated roofing materials.

FEATURES

- Bonds the skylight with roofing materials such as tiles, corrugated roofing, and standing seam metal sheets
- Wider and longer lower section provides a tighter joint with high-profile roofing material
- Includes a butyl strip that runs down the bottom section of the flashing
- Designed specifically for high-profile roofing applications

SPECIFICATIONS

PRODUCT: EH High Profile Step Flashing

COMPATIBLE SKYLIGHTS: FV, FVS, FS, FX deck-mounted skylights

ROOFING COMPATIBILITY: Tiles, corrugated roofing, and standing seam metal sheets


MAXIMUM ROOFING PROFILE HEIGHT: 1 1/4 in. or 3 1/2 in.

SEALING COMPONENT: Butyl strip along the bottom section of the flashing

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-EH-R**

EH-A FLASHING FOR DECK MOUNTED SKYLIGHTS

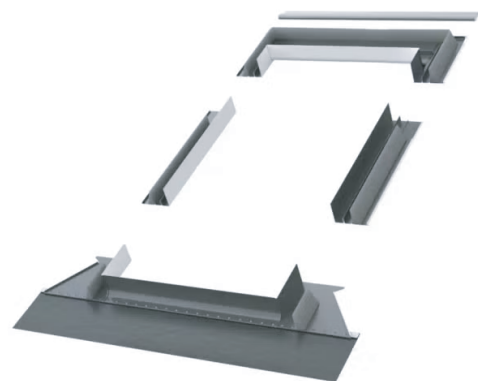

DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

STANDARD SIZES:

MANUAL OPENING SKYLIGHT FV										
Commercial Size		Window size	S [mm]	L [mm]	p [mm]	q [mm]	j [mm]	k [mm]	Rough opening	
									W [mm]	R [mm]
533	682	23x28	585	706	493	639	422	590	530	685
533	962	23x39	585	986	493	919	422	870	530	965
533	1162	23x47	585	1186	493	1119	422	1070	530	1165
533	1382	23x56	585	1406	493	1339	422	1290	530	1385
533	1784	23x71	585	1808	493	1741	422	1692	530	1787
763	962	31x39	815	986	723	919	652	870	760	965
763	1162	31x47	815	1186	723	1119	652	1070	760	1165
763	1382	31x56	815	1406	723	1339	652	1290	760	1385
1123	682	46 1/2x28	1175	706	1083	639	1012	590	1120	685
1123	1162	46 1/2x47	1175	1186	1083	1119	1012	1070	1120	1165

MANUAL OPENING SKYLIGHT FV										
Commercial size		Window size	s [in]	L [in]	p [in]	q [in]	j [in]	k [in]	Rough opening	
									w [in]	R [in]
21	26 7/8	23128	23	27 3/4	19 7/16	25 3/16	16 5/8	20 9/16	21	27 1/8
21	37 7/8	23x39	23	38 7/8	19 7/16	36 3/16	16 5/8	31 19/32	21	38 1/8
21	45 3/4	23x47	23	46 3/4	19 7/16	44 1/16	16 5/8	39 15/32	21	46
21	54 7/16	23x56	23	55 3/8	19 7/16	52 3/4	16 5/8	48 1/8	21	54 3/4
21	70 1/4	23x71	23	71 1/4	19 7/16	68 1/2	16 5/8	63 15/16	21	70 1/2
30 1/16	37 7/8	31x39	32 1/8	38 7/8	28 1/2	36 3/16	25 11/16	31 19/32	30	38 1/8
30 1/16	45 3/4	31x47	32 1/8	46 3/4	28 1/2	44 1/16	25 11/16	39 15/32	30	46
30 1/16	54 7/16	31 x56	32 1/8	55 3/8	28 1/2	52 3/4	25 11/16	48 1/8	30	54 3/4
44 1/4	26 7/8	46 1/2 x28	46 1/4	27 3/4	42 5/8	25 3/16	39 27/32	20 9/16	44	27 1/8
44 1/4	45 3/4	46 1/2 x47	46 1/4	46 3/4	42 5/8	44 1/16	39 27/32	39 15/32	44	46

For more details see the second page

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL :			
TAGGING INSTRUCTIONS :	(signature or stamp)			

Scan  or  Click



To view Pricing and Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021





228 PARK AVE. S. #76520
NEW YORK, NY, 10003




WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-EH-R

EL FLASHING FOR DECK MOUNTED SKYLIGHTS

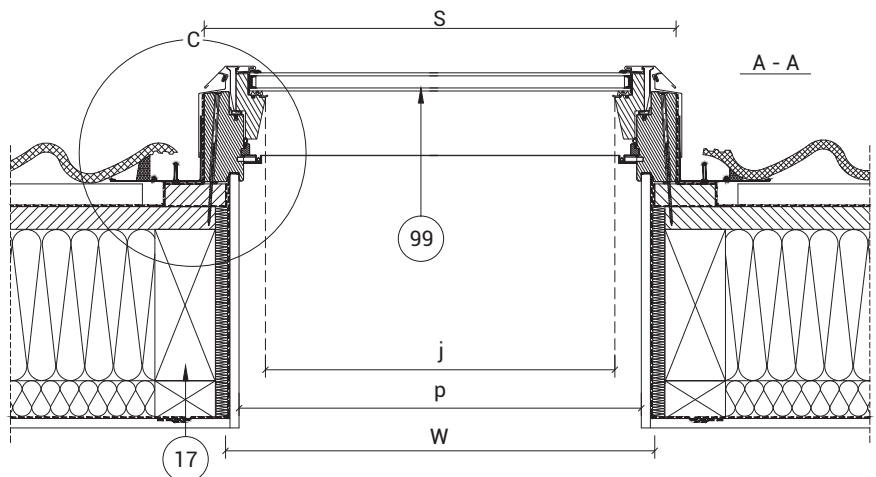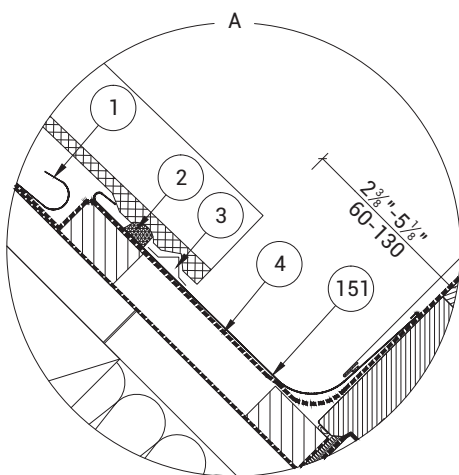

B - B



- 4-Ice and water guard by others
- 17-rafter
- 22-thermal insulation
- 99-FV opening Skylight FAKRO
- 147-top part of the flashing EL FAKRO
- 148-EL FAKRO flashing side element
- 149-EL FAKRO flashing lower element

